

Bipolar isolated converter / splitter

3118

- Conversion of voltage and current bipolar process signals to uni- /bipolar signals
- Multiple signal ranges are selectable via DIP-switches
- Splitter function: 1 signal in and 2 signals out
- Excellent accuracy, better than 0.05 % of selected range and high output load stability



Application

- The 3118 is an isolating converter and splitter which can be used for signal conversion of standard bipolar analog process signals into two individual unipolar analog signals.
- The unit offers 4-port isolation and provides surge suppression and protects control systems from transients and noise.
- The 3118 also eliminates ground loops and can be used for measuring floating signals.
- Mounting of the 3118 can be in Safe area or in Zone 2 and Cl. 1 Div 2 area and is approved for marine applications.
- The analog output can be easily configured and programmed to be bipolar in the ranges ± 10 mA and ± 20 mA (*special setup).


Technical characteristics

- Flexible 24 VDC ($\pm 30\%$) supply via power rail or connectors.
- Excellent conversion accuracy, better than 0.05% of selected range.
- A green front LED indicates operation status for the device.
- All terminals are protected against overvoltage and polarity error.
- Meeting the NAMUR NE21 recommendations, the 3118 ensures top measurement performance in harsh EMC environments.
- High galvanic isolation of 2.5 kVAC.
- Fast input to output response time < 7 ms / > 100 Hz – 10 Hz bandwidth damping possible via DIP-switch.
- Excellent signal/noise ratio > 60 dB.


Mounting / installation / programming

- Easy configuration of factory calibrated measurement ranges via DIP-switches.
- A very low power consumption allows DIN rail mounting without the need for any air gap.
- Wide temperature operation range: $-25...+70^{\circ}\text{C}$.

Applications

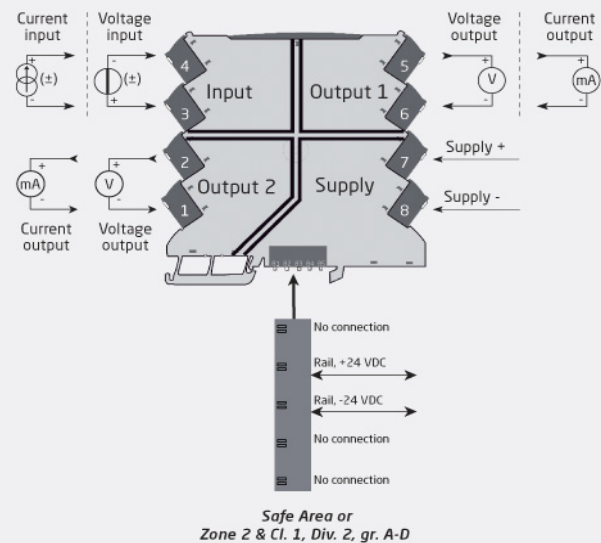

(*): Bipolar Input to bipolar output wiring set-up:

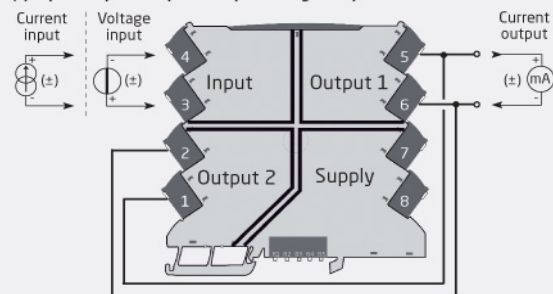

Order

Type	Version
3118	With power rail connector / terminals : - Supplied via terminals : -N

Example: 3118

Environmental Conditions

Operating temperature.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

Common specifications

Supply

Supply voltage.....	16.8...31.2 VDC
Max. required power.....	≤ 1.2 W
Max. power dissipation.....	0.43 W

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2.....	250 VAC

Response time

Response time (0...90%, 100...10%).....	< 7 ms or < 44 ms
---	-------------------

MTBF, acc. to IEC 61709 (SN29500).....	> 187 years
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Signal dynamics, input.....	Analog signal chain
Signal dynamics, output.....	Analog signal chain
Programming.....	DIP-switches
Cut-off frequency (3 dB).....	> 100 Hz or 10 Hz (selectable via DIP-switch)
Accuracy.....	< ±0.05% of span
Temperature coefficient.....	< ±0.01% of span / °C
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications

Current input

Measurement range.....	-23...+23 mA
Programmable measurement ranges.....	± 10 and ± 20 mA
Input voltage drop.....	< 1 VDC @ 23 mA

Voltage input

Measurement range.....	-11.5...+11.5 V
Programmable ranges.....	±5 and ±10 V
Input resistance.....	≥ 1 MΩ

Output specifications

Current output

Signal range.....	0...23 mA
Programmable signal ranges.....	0 / 4...20 mA
Bipolar wiring and programming set-up.....	±10 and ± 20 mA
Load (@ current output).....	≤ 300 Ω per channel
Load stability.....	≤ 0.002% of span / 100 Ω
Current limit.....	≤ 28 mA

Voltage output

Signal range.....	0...10 VDC
Programmable signal ranges.....	0/1...5 and 0/2...10 V
Load (@ voltage output).....	≥ 10 kΩ
of span.....	= of the presently selected range

I.S. / Ex marking

ATEX.....	II 3 G Ex ec IIC T4 Gc
IECEX.....	Ex ec IIC T4 Gc
FM, US.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
LVD.....	2014/35/EU & UK SI 2016/1101
ATEX.....	2014/34/EU & UK SI 2016/1107
RoHS.....	2011/65/EU & UK SI 2012/3032
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011

Approvals

ATEX.....	KEMA 10ATEX0147 X
IECEX.....	KEM 10.0068X
UKEX.....	DEKRA 21UKEX0055X
c FM us.....	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1.....	E314307
CCC.....	2020322310003554
EAC Ex.....	RU C-DK.HA65.B.00355/19
DNV Marine.....	TAA00001RW